

一、SPECIFICATIONS :


- 1、Rated Voltage: 0.66KV
- 2、Insulation Voltage: 3KV
- 3、Rated Frequency: 50HZ 或 60HZ
- 4、Operating Temperature: -15°C to 60°C
- 5、Flame resistance: UL94-V0
- 6、Certificates:




二、FEATURES:

- 1、Small cost
- 2、Split core design ,Easier installation
- 3 Build diode ,no high voltage danger
- 4、Good linearity at very low current

三、DIMENSIONS( mm ):

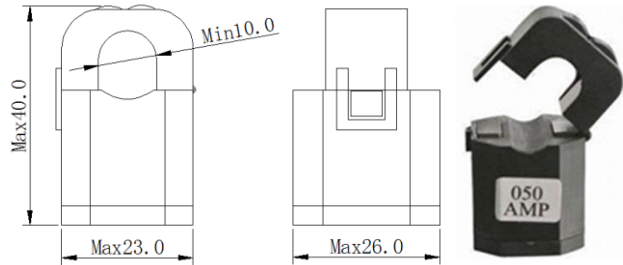

A type

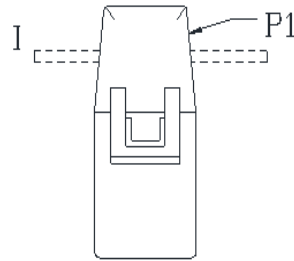

S1---White or Red , S2---Black

四、PARAMETERS

Model	Input (A)	Max current (A)	Turns(T)	Output	Accuracy
SCT-400A/100ma	63Aac	100Aac	630	100mA	1.0

六、CURVE PERFORMANCE

